


RAMMER RSS45R SCRAP SHEAR

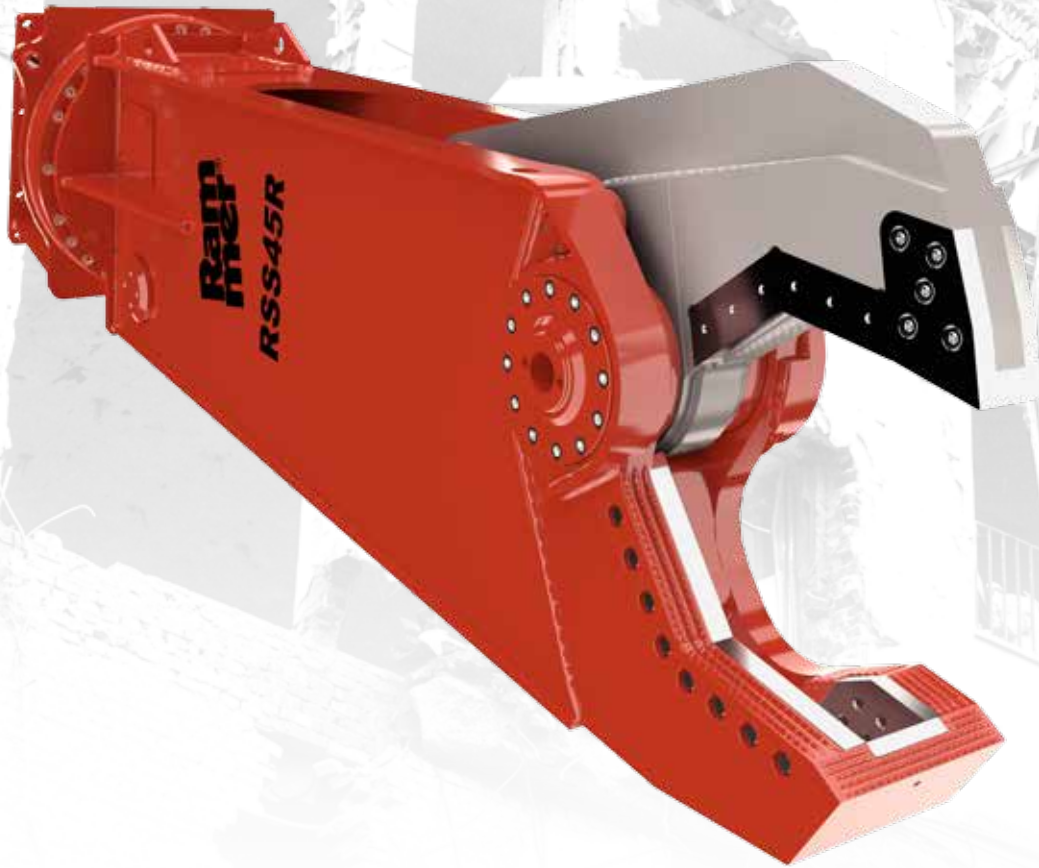

HYDRAULIC ROTATION WITH PROTECTION VALVE

The protected rotation system allows precision tool placement, lowering/reducing owning and operating costs.

BOLT ON, SYMMETRICAL CUTTER BLADES

Field replaceable and adjustable cutter blades minimize downtime and significantly increase the working life of wear parts

SMART JAWS DESIGN FEATURING DOUBLE GUIDE

Avoids material to stuck between the jaws which increases productivity and cutting capacity

SPEED VALVE

Shorter working cycles to increase productivity

HYDRAULIC CYLINDER SHIELDING

The cylinders are fully protected throughout the working cycle. Increasing durability and extending service intervals.

REPLACEABLE PEARING TIP

A bolt on pearing tip, removes the need for welding and rebuilding which lowers the cost of owning and operation.

FIELD REPLACEABLE AND ADJUSTABLE CENTRAL PIN

Enables the operator to maintain the product on the site keeping cutting capacity on the maximum level.

RSS SCRAP SHEARS


The RSS Scrap Shears can be used in every industrial demolition job involving the cutting and recovery of ferrous materials such as iron sections, pipes, tanks, railway carriages etc

**Ram
mer**[®]

RSS45R

SPECIFICATIONS

Working weight, stick mounted, kg	4700
Working weight, boom mounted, kg	4900
Operating pressure, bar	320-350
Oil flow range, l/min	250-300
Rotation working pressure, bar	100-115
Rotation oil flow, l/min	30-40
Carrier weight stick mounted, ton	39-50
Carrier weight boom mounted, ton	28-39

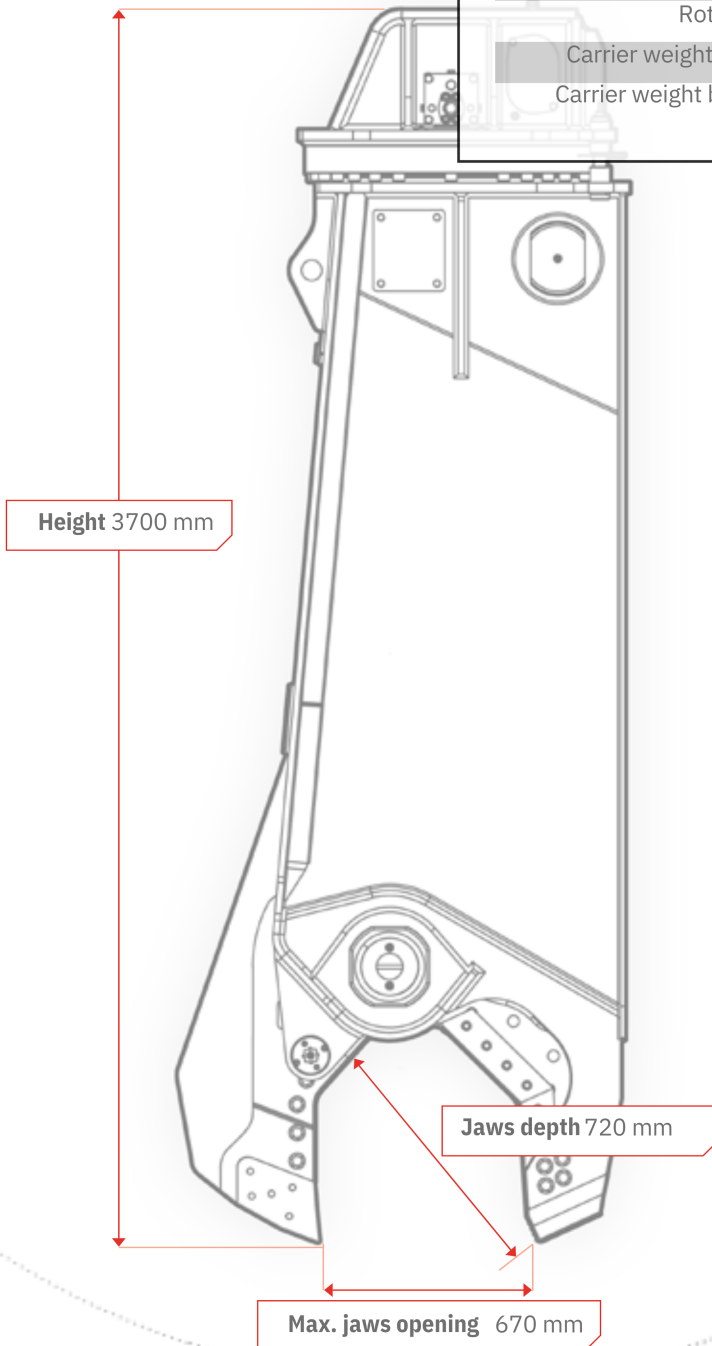

GROUND TEC
EQUIPMENT

Sydney
Ground Tec Equipment
16 Garema Cct, Kingsgrove NSW 2208

Newcastle
Ground Tec Equipment
27 Jura St, Heatherbrae NSW 2324

**Ram
mer**[®]

Contact : 02 9642 2030 / breakers@groundtec.com.au