Rammer®

RPV35R

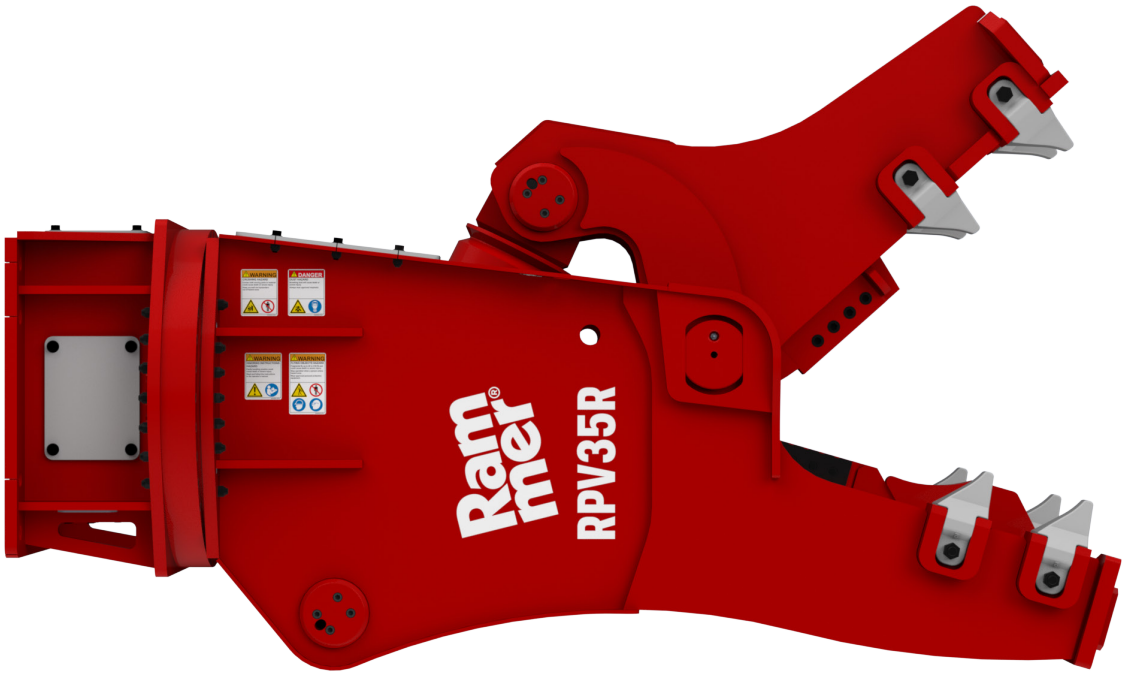

MAIN FEATURES AND BENEFITS

HYDRAULIC ROTATION
Equipped with a 360° hydraulic system to allow or correct alignment during use.

SPEED VALVE
Regenerative valve for faster opening and closing cycles and improved jobsite efficiency.

STRUCTURE MADE OF HARDOX STEEL
Manufactured using Hardox steel for excellent toughness and wear resistance, ensuring long service life in demanding demolition applications.

DUAL MOTORS
Dual hydraulic motors deliver strong, consistent torque for demanding applications.

MINIMIZE DOWNTIME
Blades are usable on all four edges to maximize wear life and reduce downtime and maintenance costs.

INTERCHANGEABLE HIGH-PENETRATION TEETH
Improve material breakage efficiency and cutting performance with High-penetrating, Interchangeable teeth.

Rammer® RPV35R

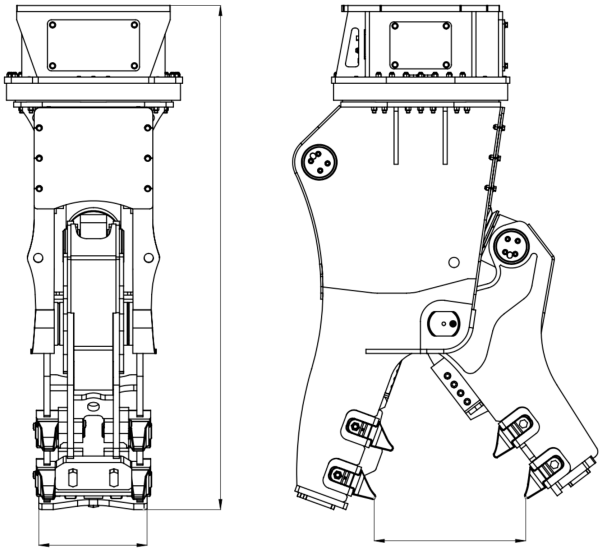

Specifications

OPERATING TOTAL WEIGHT (kg/lb)	3100 / 6834
WEIGHT (kg/lb)	2965 / 6547
HEIGHT (mm/in)	2660 / 105
OPENING (mm/in)	1010 / 39.7
WIDTH (mm/in)	550 / 21.6
OIL PRESSURE (bar / psi)	340 / 4931
ROTATION PRESSURE (bar / psi)	120 / 1740
ROTATION CAPACITY (l/min, gal/min)	15-20 / 4-5
OIL FLOW (l/min, gal/min)	280-320 / 74-84
EXCAVATOR WEIGHT (t/ lb)	30-40 / 66000-88000

Specifications are subject to change without notice

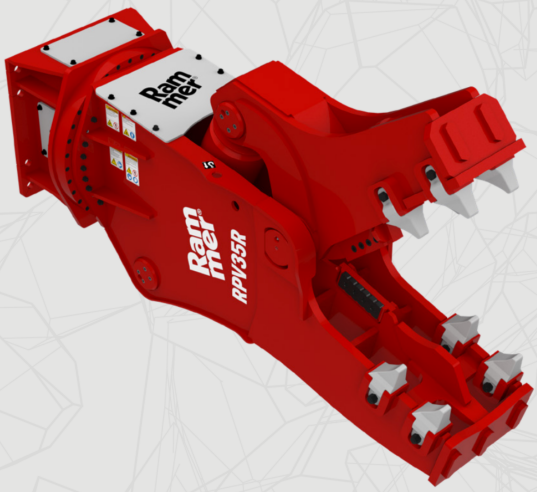

Rammer is steadily working to improve its sustainability. For us, the durability of our products is one of the key elements in paving the way towards a better future. Developed in the harshest conditions, Rammer's products are designed specifically to stand the test of time, no matter the climate or application they're used for. In a world where things are constantly changing, Rammer 's products are the trusted players that stand by your side, whatever challenges may come.

Sandvik Rock Processing
www.rammer.com

GROUND TEC EQUIPMENT

Sydney
Ground Tec Equipment
16 Garema Cct, Kingsgrove NSW 2208

Newcastle
Ground Tec Equipment
27 Jura St, Heatherbrae NSW 2324

Rammer®

Contact : 02 9642 2030 / breakers@groundtec.com.au