

# RAMMER 1655E



EXCELLENCE LINE

FACTORY  
INSTALLED  
RD3 FOR  
MYFLEET

RAMVALVE

RAMLUBE II (OPT.)

MEMBRANE TYPE  
ACCUMULATOR

DOUBLE TOOL RETAINING  
PIN STRUCTURE

FBE (FIXED BLOW ENERGY)

UPGRADED GREASING  
FOR TOOL BUSHINGS

VIDAT TIE RODS

EASY IBP ADJUSTMENT

HARD WEAR PLATES


SIMPLE LOWER TOOL  
BUSHING ROTATING OR  
REPLACEMENT

## EXCELLENCE LINE HITS SMARTER

The Rammer Excellence Line is a set of state-of-the-art hydraulic hammers for all your rock breaking needs. All Excellence Line hammers now have integrated smart technology for easier fleet management and more efficient processes.

Read more about the product from  
[www.rammer.com/excellence](http://www.rammer.com/excellence)

**Ram  
mer**<sup>®</sup>

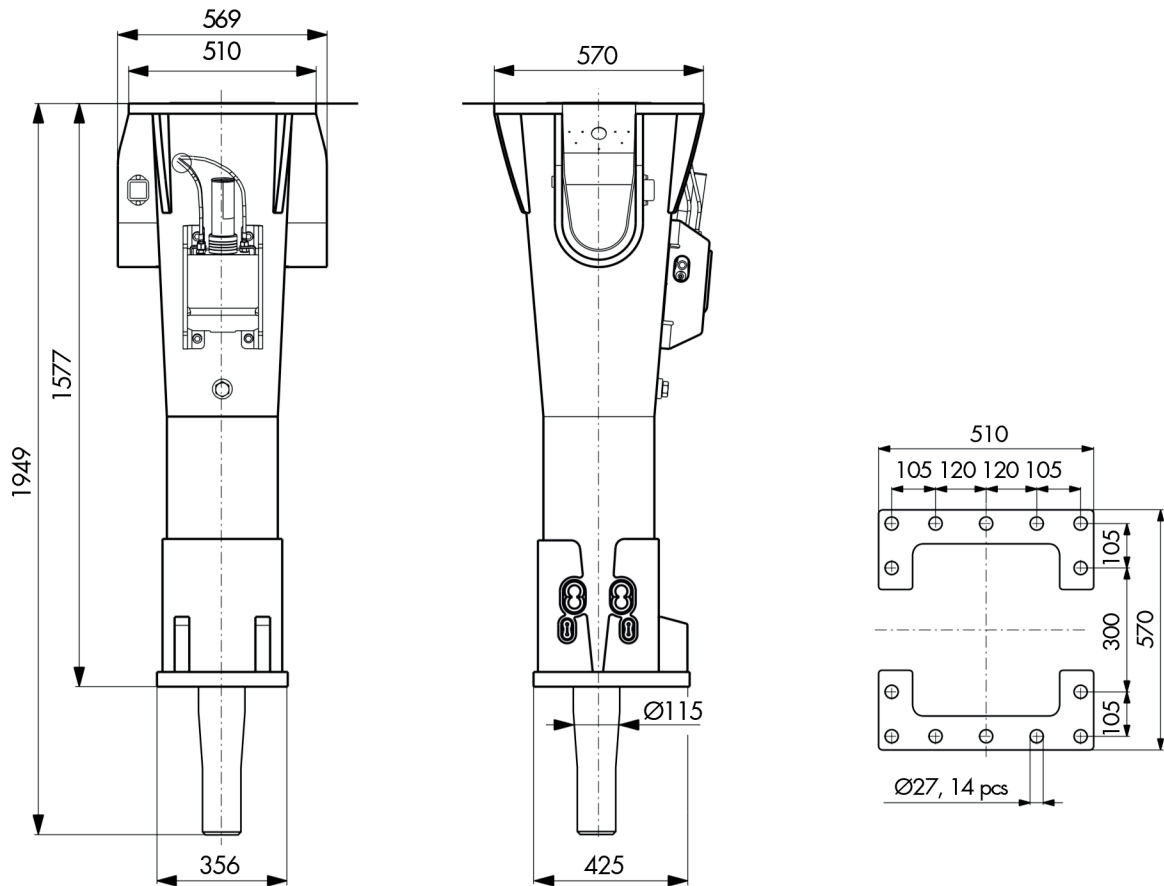

## SPECIFICATIONS

Minimum working weight, kg (lb)	1080 (2380)
Impact rate, bpm	500-920
Operating pressure, bar (psi)	135-145 (1960-2105)
Pressure relief, min bar (psi)	190 (2755)
Pressure relief, max bar (psi)	240 (3480)
Oil flow range l/min (gal/min)	90-130 (23.8-34.3)
Back pressure, max bar (psi)	10 (145)
Input power, kW (hp)	31 (42)
Tool diameter, mm (in)	115 (4.53)
Carrier weight, allowed range t (lb)	12-20 (26500-44100)
Noise level, measured sound power level, LWA, dB	123
Noise level, guaranteed sound power level, LWA, dB	127

## TOOLS

Chisel	Pyramid
Moil point	Blunt

## PARTS

Service kit 1	Special tool grease
Service kit 2	Meissel paste

Specifications are subject to change without notice

**GROUND TEC**  
EQUIPMENT

**Sydney**

Ground Tec Equipment  
16 Garema Cct, Kingsgrove NSW 2208

**Newcastle**

Ground Tec Equipment  
27 Jura St, Heatherbrae NSW 2324

**Rammer**

Contact : 02 9642 2030 / breakers@groundtec.com.au